



# Big Dutchman®



## **Vista 360**


The new feed pan for successful broiler growing

# Vista 360 – the ideal feed pan for broiler growing

**Vista 360** is a feed pan for broiler growing newly developed by Big Dutchman. The pan not only satisfies the needs of day-old chicks but also those of heavy birds during the final grow-out period. The following points are essential for

- successful broiler rearing and growing:
- ✓ easy access to feed for broilers of every age
  - ✓ minimal feed wastage
  - ✓ no breast bruises in the final grow-out period

- ✓ simple, thorough cleaning.
- Vista 360 fulfils all of these requirements optimally. Let our experts advise you how to find the best solution for your individual needs.

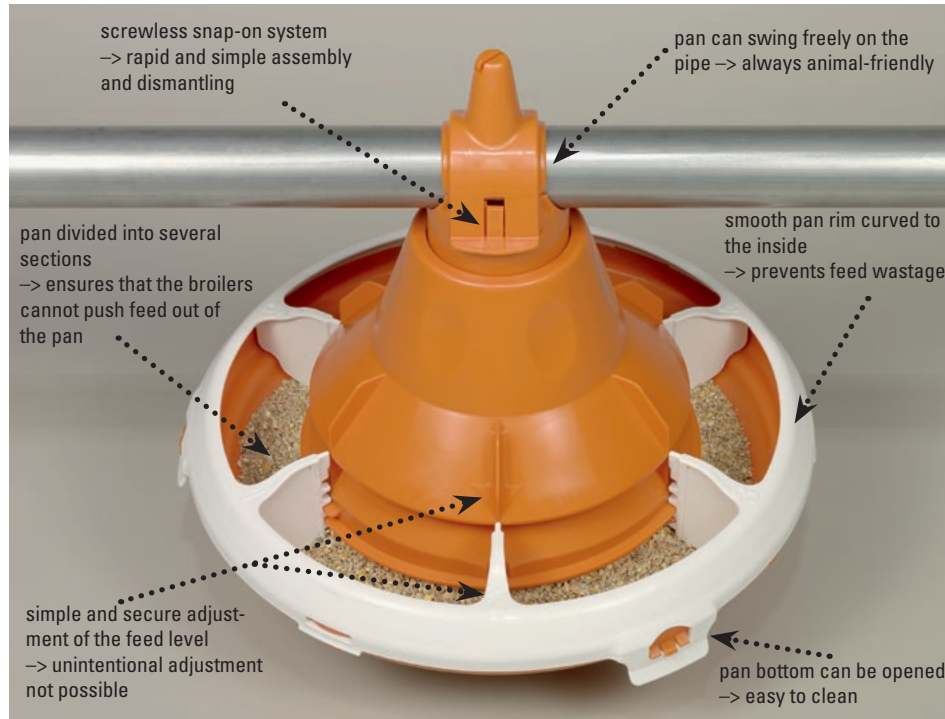

## Important advantages

- ✓ the innovative 360° flooding mechanism ensures a high feed level in the pan -> ideal start for day-old chicks;
- ✓ starting with the feed level adjusted to 3, the pan can be »overflooded« -> optimum chick start;
- ✓ the flooding mechanism closes automatically when the pan is lifted -> the feed level is lowered, reducing feed wastage to an absolute minimum;
- ✓ no barriers -> easy access to feed for broilers of every age;
- ✓ the pan is made of high-quality, UV-resistant plastic;
- ✓ the pan can be cleaned thoroughly with a high-pressure cleaner.

Vista 360 – chicks can easily access the feed in the pan

## Reference values and technical data for the use of Vista 360

### Broiler growing – ad libitum feeding

- 1 feeding line per 4 to 5 m house width, i.e.
- 9 to 12 m house width -> 2 feeding lines
  - 12 to 15 m house width -> 3 feeding lines
  - 15 to 18 m house width -> 4 feeding lines

### Final weight birds/Vista 360

up to 1.5 kg	approx. 117
up to 2.0 kg	approx. 94
up to 2.5 kg	approx. 79
up to 3.0 kg	approx. 70
up to 3.5 kg	approx. 63

- Hopper with feed container
- Extension for feed container
- Maximum length of system
- Feed pipe with 2, 3, 4 holes
- Length of pipes
- Drive unit with gear motor

content approx. 115 l / 75 kg  
 content approx. 38 l / 25 kg  
 150 m  
 Ø 45 mm  
 3000 mm + sleeve coupling  
 0.37/0.55 kW, 230/400 V,  
 50 Hz, 3 phases, 325 rpm  
 special voltages on  
 request  
 approx. 450 kg/h  
 up to 4 mm  
 central ceiling winch,  
 manual or with motor

These figures are average values and can vary depending on the breed, stocking density and climate. Additionally, regional reference values must be considered.

- Conveying capacity
- Size of pellets
- Suspension



# Big Dutchman.

**Germany:**  
**Big Dutchman International GmbH**  
 Postfach 1163 · 49360 Vechta  
 Tel. +49(0)4447 801-0 · Fax -237  
 big@bigdutchman.de  
 www.bigdutchman.de

**USA: Big Dutchman, Inc.**  
 Tel. +1 616 392 5981 · bigd@bigdutchmanusa.com  
 www.bigdutchmanusa.com

**Brazil: Big Dutchman (Brasil) Ltda.**  
 Tel. +55 16 2108 5300 · bdb@bigdutchman.com.br  
 www.bigdutchman.com.br

**Russia: 000 "Big Dutchman"**  
 Tel. +7 495 229 5161 · big@bigdutchman.ru · www.bigdutchman.ru

**Asia/Pacific: BD Agriculture (Malaysia) Sdn. Bhd.**  
 Tel. +60 3 3361 5555 · bdasia@bigdutchman.com · www.bigdutchman.com

**China: Big Dutchman (Tianjin) Livestock Equipment Co., Ltd.**  
 Tel. +86 10 6476 1888 · bdcnsales@bigdutchman.com  
 www.bigdutchman.cn